


PRODUCT SHEET: WH

Resilient Wall Tie

WH resilient wall ties enable walls to be mechanically tied together without rigidly connecting them. Walls can be either stud walls (via bolt end) or brick block walls (via hooked end).

SYSTEM FEATURES:

- » Fixings can be adapted to wall type
- » Cost effective
- » Easy to install
- » Minimum void depth between walls is 60mm
- » Standard wall tie (CDM-WH-350) is designed to take maximum 50kg lateral force
- » Can be adapted to meet different void depths and lateral forces
- » Steel parts are Zinc plated
- » For optimum results resilient strips should be used to provide isolation between the decoupled wall and the non-isolated structure. A wide range of roll sizes are available.

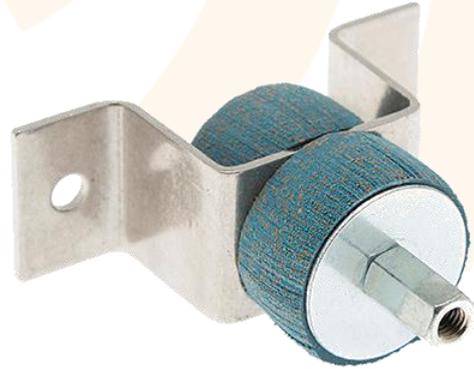

REQUIREMENTS:

To specify which WH wall tie you require, our engineers will need to know:

- » Void depth
- » Construction of supported wall - stud wall, block wall etc..
- » The depth of the block wall or stud to be supported
- » The method of fixation into the supporting wall

